


UHD 40-80F




| Ix230 V, 50Hz, IEC38 | PI [W] | I [A] |
|----------------------|--------|-------|
| Auto min. | 30 | 0,20 |
| Auto max. | 250 | 1,20 |

| Temperature Range (TF 110 - CEN 335-2-51) | | |
|---|-----|-----|
| Water temp max. [°C] | 90 | 110 |
| Water temp min. [°C] | -10 | -10 |
| Ambient temp max. [°C] | 40 | 30 |


| | | |
|------------|------------|------------|
| NPSH [bar] | 80°C - 0,5 | 95°C - 1,5 |
| Kg. (net) | 16,5 | |

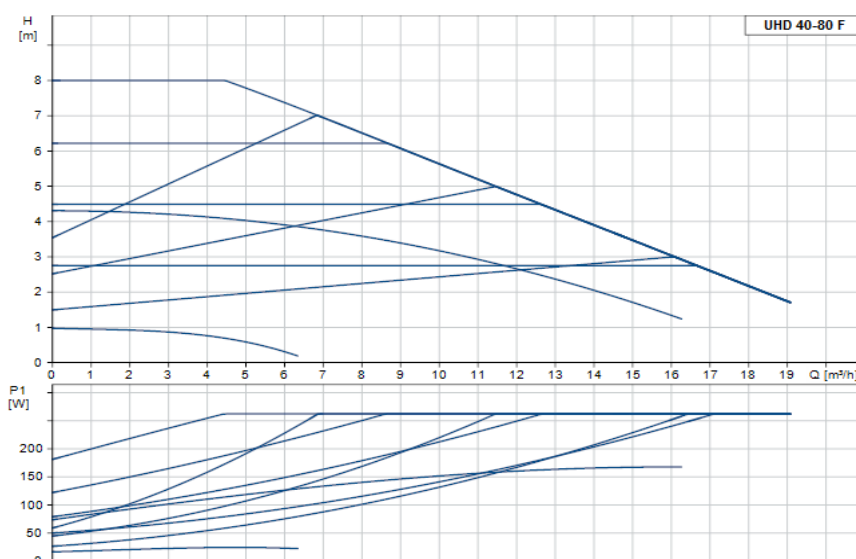

Installation

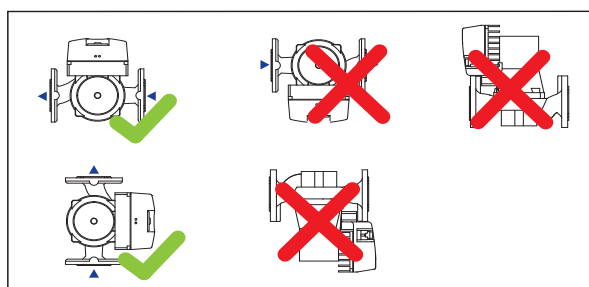

Electrical connection and Signals



Dimensions

